

5th Wheels

- Curt Mfg. 5th Wheels
- Curt Mfg. 5th Wheel Rails
- Curt Mfg. Custom Rails
- Tuff-Tow 5th Wheels
- PullRite 5th Wheels
- PullRite 5th Wheel Rails
- B & W 5th Wheels
- 5th Wheel Accessories
- Tailgates

5th Wheels

Curt Mfg. 5th Wheels



A: Capacity

Item Number	Description	A
CU16115	5th Wheel Hitch No Rails	16K
CU16116	5th Wheel Hitch w/Rails	16K
CU16120	5th Wheel 16K Hitch Q16	16K
CU16125-SK1	5th Wheel Bearing & Retaining Clip	N/A
CU16125-SK2	5th Wheel Pin Mounting Kit 4pk	N/A
CU16130	5th Wheel Hitch w/Legs	20K
CU16131	5th Wheel Hitch w/Legs and Rails	20K
CU16245	5th Wheel Hitch	24K
CU16246	5th Wheel Hitch w/Rails	24K
CU16515	5th Wheel Hitch Head Only	16K
CU16516	5th Wheel Hitch w/Roller No Rail	16K
CU16520	5th Wheel 16K Head Only Q16	16K
CU16530	5th Wheel Hitch Head Only	20K
CU16536	5th Wheel w/Roller No Rail	20K
CU16545	5th Wheel Hitch Head only	24K
CU16546	5th Wheel 24K w/Roller No Rails	24K
CU16550	5th Wheel Roller	20K
CU16560	5th Wheel Roller	16K
CU16570	5th Wheel Roller	24K
CU16616	5th Wheel Hitch w/Roller & Rail	16K
CU16636	5th Wheel w/Roller & Rail	20K
CU16646	5th Wheel Hitch w/Roller & Rail	24K

5th wheels

5th Wheels

Curt Mfg. 5th Wheels

16K
GTW

Q16 5TH WHEEL HITCH

WTS Uses "CU" in front of all CURT Item Numbers

NEW

- Up to 16,000 lbs. GTW / 4,000 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- High-strength interlocking cast jaws fully wrap the kingpin to eliminate noise
- Fully articulating torsion head for controlled coupling and a stable, quiet ride
- Extra wide head opening for easier coupling
- Three-position coupling indicator is clearly visible from the vehicle cab
- Lockable handle self-resets to the couple position when hitch is uncoupled
- Cast yolk, with poly-torsion inserts, suppresses shock loads and reduces noise
- Compatible with kingpin extension boxes, including common pivoting pin boxes
- Fast, one-pin head removal makes moving hitch to another vehicle easy
- Attractive design - looks great in truck beds
- Mounts to industry-standard rails
- Includes polyethylene lube plate
- Meets proposed SAE J2638 testing standards
- Durable carbide powder coat finish
- Limited lifetime warranty



16902

Three-position coupling indicator



Back of Q16 head

UNCOUPLE

Jaws locked open. Indicates it is safe to pull the truck away from the trailer. Do not couple!

COUPLE

Jaws ready to couple. Indicates it is safe to back the truck in for coupling to your trailer.

TOW

Jaws locked closed. Indicates it is safe to tow the trailer. Visibly inspect to ensure proper coupling.



Extra wide head opening for easy coupling and the high-strength interlocking jaws eliminate noise



Fully articulating torsion head for controlled coupling and a stable, quiet ride



Lockable handle self-resets to the couple position when the hitch is uncoupled



Cast yolk, with poly-torsion inserts, suppresses shock loads and reduces noise



16520



16521



16621

Pkg#	Description	GTW / Vertical Load	Height	Finish
16120 NEW	Q16 5th wheel	16,000 / 4,000 lbs.	13' - 17'	Carbide
16121 NEW	Q16 5th wheel with base rails (16200)	16,000 / 4,000 lbs.	13' - 17'	Carbide
16520 NEW	Q16 5th wheel head unit (for use with the 16560 R16 roller)	16,000 / 4,000 lbs.	--	Carbide
16521 NEW	Q16 5th wheel (16520) with R16 roller (16560)	16,000 / 4,000 lbs.	17 1/2' - 21 1/2'	Carbide
16621 NEW	Q16 5th wheel (16520) with R16 roller (16560) and base rails (16200)	16,000 / 4,000 lbs.	17 1/2' - 21 1/2'	Carbide
16920 NEW	Q16 replacement leg kit and hardware	--	--	Carbide
16902	Replacement rail pins & clips	--	--	Yellow zinc

For replacement parts visit curtmfg.com

5th Wheels

Curt Mfg. 5th Wheels

24K
GTW

Q24 5TH WHEEL HITCH

WTS Uses "CU" in front of all CURT Item Numbers

- Up to 24,000 lbs. GTW / 6,000 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- Spherical axial bearing ensures smooth, quiet towing and allows for unimpeded head movement
- Dual jaws provide 360° kingpin contact
- Coupling indicators visible from vehicle cab
- Self-aligning head
- Short throw, single-handle operation
- Wide head opening for easy coupling
- Lockable
- Mounts to industry-standard rails
- Three grease fittings for easy lubrication
- Includes polyethylene lube plate
- Meets proposed SAE J2638 testing standards
- Durable carbide powder coat finish
- Ten year limited warranty



Pkg#	Description	GTW / Vertical Load	Height	Finish
16245	Q24 5th wheel	24,000 / 6,000 lbs.	13" - 17"	Carbide
16248	Q24 5th wheel with base rails (16200)	24,000 / 6,000 lbs.	13" - 17"	Carbide
16545	Q24 5th wheel head unit (for use with the 16570 R24 roller)	24,000 / 6,000 lbs.	--	Carbide
16546	Q24 5th wheel (16545) with R24 roller (16570)	24,000 / 6,000 lbs.	17 1/2" - 21 1/2"	Carbide
16646	Q24 5th wheel (16545) with R24 roller (16570) and base rails (16200)	24,000 / 6,000 lbs.	17 1/2" - 21 1/2"	Carbide
16913	Q24 replacement leg kit and hardware	--	--	Carbide
16902	Replacement rail pins & clips	--	--	Yellow zinc

Three-position coupling indicator



Visible from inside the truck
Color indicator locations



UNCOUPLE

Jaws locked open. Indicates it is safe to pull the truck away from the trailer. Do not couple!



COUPLE

Jaws ready to couple. Indicates it is safe to back the truck in for coupling to your trailer.



TOW

Jaws locked closed. Indicates it is safe to tow the trailer. Visibly inspect to ensure proper coupling.

For replacement parts visit curtmfg.com

5th Wheels

Curt Mfg. 5th Wheels

WTS Uses "CU" in front of all CURT Item Numbers

20K GTW Q20 5TH WHEEL HITCH

- Up to 20,000 lbs. GTW / 5,000 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- Spherical axial bearing ensures smooth, quiet towing and allows for unimpeded head movement
- Dual jaws provide 360° kingpin contact
- Coupling indicators visible from vehicle cab
- Self-aligning head
- Short throw, single-handle operation
- Wide head opening for easy coupling
- Lockable
- Mounts to industry-standard rails
- Three grease fittings for easy lubrication
- Includes polyethylene lube plate
- Meets proposed SAE J2638 testing standards
- Durable carbide powder coat finish
- Ten year limited warranty



Pkg #	Description	GTW / Vertical Load	Height	Finish
16130	Q20 5th wheel	20,000 / 5,000 lbs.	13' - 17'	Carbide
16131	Q20 5th wheel with base rails (16200)	20,000 / 5,000 lbs.	13' - 17'	Carbide
16530	Q20 5th wheel head unit (for use with the 16550 R20 roller)	20,000 / 5,000 lbs.	--	Carbide
16538	Q20 5th wheel (16530) with R20 roller (16550)	20,000 / 5,000 lbs.	17 1/2' - 21 1/2'	Carbide
16636	Q20 5th wheel (16530) with R20 roller (16550) and base rails (16200)	20,000 / 5,000 lbs.	17 1/2' - 21 1/2'	Carbide
16904	Q20 replacement leg kit and hardware	--	--	Carbide
16902	Replacement rail pins & clips	--	--	Yellow zinc

Three-position coupling indicator



Visible from inside the truck
Color indicator locations



UNCOUPLE

Jaws locked open. Indicates it is safe to pull the truck away from the trailer. Do not couple!

COUPLE

Jaws ready to couple. Indicates it is safe to back the truck in for coupling to your trailer.

TOW

Jaws locked closed. Indicates it is safe to tow the trailer. Visibly inspect to ensure proper coupling.

For replacement parts visit curtmfg.com

5th Wheels

Curt Mfg. 5th Wheels

16K
GTW

E16 5TH WHEEL HITCH

WTS Uses "CU" in front of all CURT Item Numbers

- Up to 16,000 lbs. GTW / 4,000 lbs. vertical load
Never exceed vehicle's maximum gross weight rating
- Single-handle operation
- Auto-locking mechanism
- Dual-pivot head
- Four-position height adjustment
- 10° lateral movement
- Anti-rattle skid plate
- Mounts to industry-standard rails
- Meets proposed SAE J2638 testing standards
- Durable carbide powder coat finish
- Five year limited warranty



16515



16560



16616

Pkg#	Description	GTW / Vertical Load	Height	Finish
16115	E16 5th wheel	16,000 / 4,000 lbs.	13" - 17"	Carbide
16116	E16 5th wheel with base rails (16200)	16,000 / 4,000 lbs.	13" - 17"	Carbide
16515	E16 5th wheel head unit (for use with the 16560 R18 roller)	16,000 / 4,000 lbs.	--	Carbide
16516	E16 5th wheel (16515) with R18 roller (16560)	16,000 / 4,000 lbs.	14" - 17"	Carbide
16616	E16 5th wheel (16515) with R18 roller (16560) and base rails (16200)	16,000 / 4,000 lbs.	14" - 17"	Carbide
16903	E16 replacement leg kit	--	--	Carbide
16902	Replacement rail pins & clips	--	--	Yellow zinc

For replacement parts visit curtmfg.com

20K
GTW

X5 ADAPTER PLATE DOUBLE LOCK TO 5TH WHEEL

- Converts Double Lock and competitive gooseneck hitches to 5th wheel rails
- For use with CURT and other common 5th wheel hitches up to 20,000 lbs.



Replaces Double Lock trailer ball



Quickly provides 5th wheel rails



Accepts 5th wheel hitches and rollers



16210




16310

Bulk#	Shank Style	Fits
16210	Round shank	CURT 60607, 60615, 60620, 60625
16220 NEW	Round shank	CURT EZr 60611 and 60612
16310	Square shank	Competitive products

5th Wheels

Curt Mfg. 5th Wheel Rails

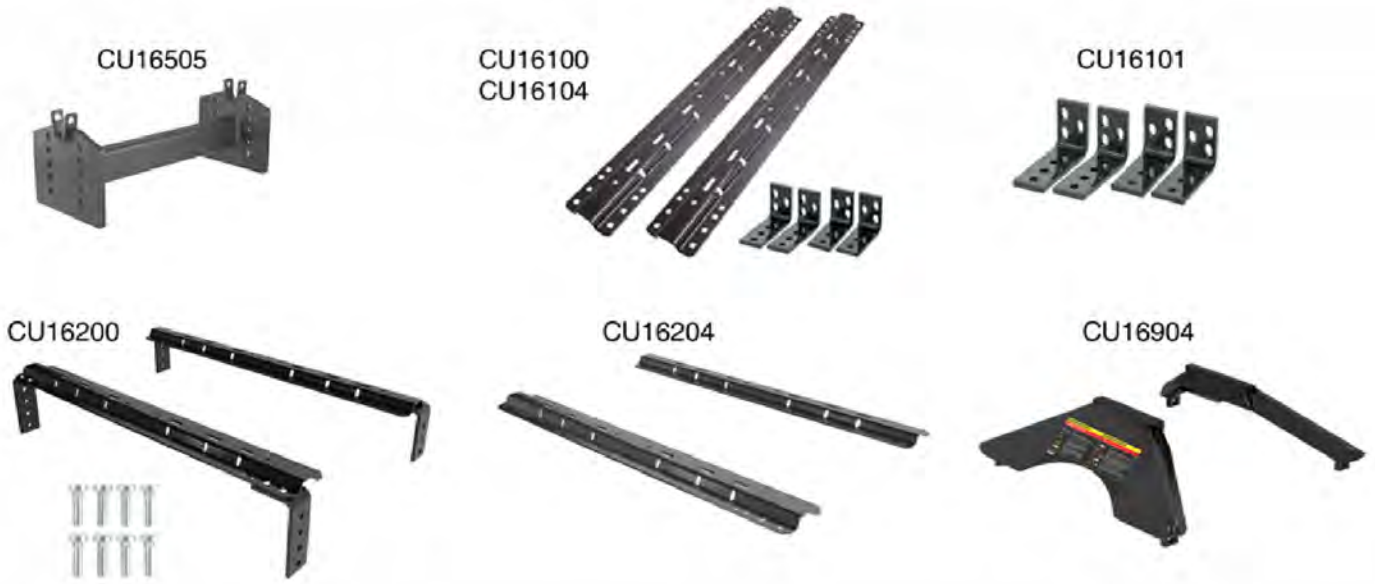

Item Number	Description	SO
CU16000	5th Wheel Safety Chain Loops	
CU16100	5th Wheel Rail Mounting Kit	
CU16101	5th Wheel Rail Mounting Kit	
CU16104	5th Wheel Rail Only	
CU16125-SK13	5th Wheel Support Legs	Yes
CU16200	5th Wheel Rail	
CU16204	5th Wheel Rail Only	
CU16505	5th Wheel Adapter Roller	
CU16904	5th Wheel Leg Kit	

5th Wheels

Curt Mfg. 5th Wheel Rails

5TH WHEEL HITCH ROLLER UNITS

- Up to 24,000 lbs. GTW
- Non-binding rods
- True rolling unit - not just a slider
- 12" travel - most competitive models only offer 10"
- Wheels bear the weight, not the rods - Many competitive models rely on hollow rods to bear the weight
- Mounts to industry-standard rails
- Durable carbide powder coat finish
- Ten year limited warranty (20K and 24K)
- Five year limited warranty (16K)



24K
GTW **R24**
ROLLER



16570

20K
GTW **R20**
ROLLER



16550

16K
GTW **R16**
ROLLER



16580

Pkg#	Description	GTW	Finish
16570	R24 5th wheel hitch roller unit	24,000 lbs.	Carbide
16550	R20 5th wheel hitch roller unit	20,000 lbs	Carbide
16580	R16 5th wheel hitch roller unit	16,000 lbs.	Carbide
16505	Included in 16515, 16518 and 16618 kits. Adapts 16115 or 16116 head to CURT rollers	--	Carbide
16902	Replacement rail pins & clips	--	Yellow zinc

For replacement parts visit curtmfg.com



16505

WTS Uses "CU" in front of all CURT Item Numbers

FORD & RAM OEM COMPATIBLE 5TH WHEEL LEGS

- Up to 24,000 lbs. GTW
- Converts any CURT 5th wheel hitch head to Ford and RAM's OEM under-bed hitch platforms
- Quarter-turn anchoring system for quick installation and removal
- Anchors can be adjusted to eliminate chocking between the legs and under-bed rails
- Made in the USA
- Durable carbide powder coat finish
- Limited lifetime warranty



16021

Pkg#	Make	GTW	Finish
18021	NEW RAM	Up to 24,000 lbs.	Carbide
18017	NEW Ford	Up to 24,000 lbs.	Carbide



16017

5th Wheels

Curt Mfg. 5th Wheel Rails

25K
GTW

5TH WHEEL RAIL GOOSENECK HITCHES

WTS Uses "CU" in front of all CURT Item Numbers

- Four-pin installation and removal for easy access to truck bed
- Spyder includes welded trailer ball, chain hook-ups and pins & clips
- Bent plate includes welded trailer ball, with 3" offset from front to rear
- Mounts to industry standard 5th wheel rails



16085



16055



Attaches to 5th wheel rails



Quickly provides gooseneck hitch



Attaches to 5th wheel rails



Provides 3' offset gooseneck hitch



16902

Pkg#	Ball Size	GTW	Finish	Description
16085	2 5/16"	25,000 lbs.	Carbide	Spyder gooseneck hitch
16055	2 5/16"	25,000 lbs.	Carbide	Bent plate gooseneck hitch
16902	--	--	Yellow zinc	Replacement rail pins & clips

SEMI-CUSTOM 5TH WHEEL BRACKET KITS

- Required for the vehicles listed below.
- Use in combination with 16104 / 16204 rails
- 16300 and 16305 do not require universal brackets



16303

16301

16300

Make / Model	Style	Years	Bracket Kit#	Base Rails Needed		Notes
				Carbide	Black	
Dodge / RAM						
RAM 1500	Excluding air bag suspension	09 - 14	16305*	16204	16104	Drill
		02 - 08	16303	16200	16100	Drill
RAM 2500 / 3500	--	03 - 12	16301	16200	16100	Drill
Ford						
F-150	Excluding Heritage Edition	04 - 11	16300*	16204	16104	Drill
Toyota						
Tundra	6' 5" and 8' beds, excluding Crew Max Standard cab, long box	07 - 08	16304	16200	16100	Drill
		00 - 06	16302	16200	16100	Drill

* Use with 16104 / 16204 rails, universal brackets are not required



16302



16304

5th Wheels

Curt Mfg. 5th Wheel Rails Custom & Semi-Custom Fifth Wheel Brackets Kits

CUSTOM 5TH WHEEL BRACKET KITS

- Reduces or eliminates drilling, which can cut installation times in half
- Use in combination with 16104 / 16204 rails
- No need for universal brackets and hardware



Make / Model	Style	Years	Bracket Kit#	Base Rails Needed		Notes
				Carbide	Black	
Chevrolet / GMC						
1500 / 2500LD Silverado / Sierra	New body	07 - 14	16412	16204	16104	⊘
	Classic body	99 - 07	16418	16204	16104	--
2500HD / 3500 Silverado / Sierra	--	11 - 14	16413	16204	16104	⊘
		01 - 10	16418	16204	16104	--
Dodge / RAM						
RAM 1500	Excluding air bag suspension	11 - 14	16305	16204	16104	--
	Excluding Crew Cab	09 - 10	16422	16204	16104	--
	Excluding Mega and Crew Cabs	2009	16421*	16204	16104	--
	Mega Cab	06 - 08	16420	16204	16104	⊘
	Excluding Mega Cab	02 - 08	16419	16204	16104	⊘
RAM 2500	--	2013	16426	16204	16104	⊘
		03 - 12	16420	16204	16104	⊘
RAM 3500	--	13 - 14	16426	16204	16104	⊘
		03 - 12	16420	16204	16104	⊘
Ford						
F-150 / F-250LD	6' 5" and 8" beds	04 - 13	16441	16204	16104	⊘
	--	97 - 03	16437	16204	16104	⊘
F-150	Heritage Edition	2004	16437	16204	16104	⊘
F-250 / F-350 Super Duty	--	11 - 14	16424	16204	16104	⊘
		05 - 10	16448	16204	16104	--
		99 - 04	16443	16204	16104	--
F-450 Super Duty	Excluding Cab & Chassis	11 - 14	16424	16204	16104	⊘
		08 - 10	16448	16204	16104	--
Nissan						
Titan	--	04 - 12	16470	16204	16104	--
Toyota						
Tundra	6' 5" bed, excluding Crew Max	07 - 14	16468	16204	16104	--
	Standard cab, long box	00 - 06	16465	16204	16104	⊘

⊘ = No drill * Continued while supplies last

WTS Uses "CU" in front of all CURT Item Numbers

UNIVERSAL 5TH WHEEL BASE RAILS

- Can be used with all CURT and competitive 5th wheels, rollers, bent plate goosenecks and Spyder goosenecks
- Some vehicles require semi-custom brackets,



Gloss#	Carbide#	Zinc#	Multi-Pack#	Description
16100	16200	--	--	Two 5th wheel base rails (with 16101 universal brackets)
16104	16204	--	--	Two 5th wheel base rails only (without 16101 universal brackets)
16101	--	--	--	Universal installation brackets and hardware
--	--	16111	--	Universal installation hardware, no brackets included
--	--	16103	16103010	Replacement rail bolts, needed when reinstalling used rails; 16103 contains 8 bolts, 16103010 contains 10 sets of 8 bolts



16111

5th Wheels

Tuff-Tow 5th Wheels, Brackets & Parts



Tuff-Tow
Products

A: Capacity

Item Number	Description	SO	A
15500	5th Wheel Hitch w/Rails		16K
15550	Universal Rail Kit w/Hardware		N/A
15551	5th Wheel Hitch Head Only	Yes	N/A
TT16130	5th Wheel Hitch w/Legs		20K
TT16131	5th Wheel Hitch w/Legs and Rails		20K
TT16530	5th Wheel Hitch Head Only		20K
TT16536	5th Wheel w/Roller No Rail		20K
TT16550	5th Wheel Roller		20K
TT16636	5th Wheel w/Roller & Rail		20K
TTFWBK	5th Wheel Hitch Bolt Pack		N/A
TTFWH	5th Wheel Hitch Handle		N/A
TTFWIK	Universal 5th Wheel Hitch Installation Kit		N/A
TTFWPK	5th Wheel Hitch Pin Mount		N/A



5th Wheels

5th Wheels

PullRite 5th Wheels



A: Capacity

Item Number	Description	A
PR0503	Super 5th Fifth Wheel	25.5K
PR0515	SuperGlide Low Profile 5th Wheel	25.5K
PR0516	SuperGlide Low Profile 5th Wheel	25.5K
PR0800	Super 5th Fifth Wheel	20.5K
PR1200	Super 5th Fifth Wheel	16K
PR1300	5th Wheel OE Series	18K
PR1400	5th Wheel OE Series	25K
PR1900	Super 5th Fifth Wheel ISR	16K
PR2100	Super 5th Fifth Wheel ISR	18K
PR2700	SuperGlide 5th Wheel ISR	15K
PR2751	5th Wheel Display	N/A
PR2900	SuperGlide 5th Wheel ISR	18K
PR3100	SuperGlide 5th Wheel	12K
PR3600	SuperGlide 5th Wheel	24K
PR3601	SuperGlide 5th Wheel Head	18K
PR4100	SuperGlide 5th Wheel	16K
PR4400	SuperGlide 5th Wheel	20K

5th Wheels

5th Wheels

PullRite 5th Wheels

QUALITY AND INNOVATION BUILT INTO EACH HITCH!

LOWER HANDLE

Allows use of bed cover without removing the handle and fits under most tonneau covers.

AUTOMATIC LOCKING HANDLE

We have the only self-latching handle on the market - no reaching or climbing over the bed rails to engage secondary locking devices.

REMOVABLE HITCH AND BASE RAILS

With SuperRails, one turn of the mounting posts, leaves you with a completely clear truck bed! Now hauling those landscape supplies can be done without the aggravation!



4-WAY ARTICULATION

All PullRite hitches offer up to 14 degree tilt each way, making hook-up easier on uneven ground. Tilting feature also eliminates stress on the truck and trailer frame when travelling over rough roads.

SOLID, "NO BUMP" TOWING

Rotary gear-driven jaw rotates completely around the king pin leaving just .030" tolerance, eliminating the "slide bar" and "clam-shell" type wear points of other brands!

JAW CLOSES AUTOMATICALLY

Popular "clam-shell" type designs don't always close on their own. PullRite's plate not only closes automatically, but locks when the Release Handle Catch is engaged!

MORE STRENGTH

SuperBrackets are custom mounting kits that fasten all the base rail bolts to the frame bracket. Most industry-wide universal frame brackets utilize only half of the mounting holes. The other half is only through the sheet metal of the truck bed—don't settle for half!



SuperGlide

HOW IT WORKS...

No other "automatically" sliding hitch on the market compares to the original! No more getting out of your truck to make tight turns, no climbing over truck beds to throw levers, and no step stools required! Just get in and drive!

Stop worrying if you're going to slam your trailer into your cab when making tight turns! All SuperGlides feature our patented cam-glide technology, and with a minimum of 14" of travel, all you have to do is get in and drive!



Hitch in forward position.



Turn initiated. Hitch slides back automatically away from cab.



Hitch moves trailer to a 90 degree position, safe for any turn.

5th Wheels

PullRite 5th Wheels



TRADITIONAL SERIES

MEQ#	DESCRIPTION
3100	12K SuperGlide, 22.75"
4100	14K SuperGlide, 14"
4400	20K SuperGlide, 14"
3600	24K SuperGlide, 18"

SUPERRAIL MOUNTING KITS



Includes totally removable base rails, custom brackets and mounting hardware.

See PullRite.com for more information



FULLY AUTOMATIC SLIDER for SHORT BED TRUCKS

PullRite's automatically sliding SuperGlide hitch, lets you forget the hassle and just drive! The Traditional Series of SuperGlide hitches solves towing with a super short bed (less than six foot) or with installed under-bed gooseneck hitch. Mounted on our proprietary rails, enjoy the safety and strength expected from PullRite. The ISR Series gives you the same worry free towing, but on the rails you already have installed. Easily upgrade from your manual slider hitch to an American made ISR SuperGlide, or install it fresh with PullRite's new fully removable ISR SuperRails for a clean bed when not towing.



ISR SERIES

MEQ#	DESCRIPTION
2700	15K ISR SuperGlide, 14"
2900	18K ISR SuperGlide, 14"
2300	24K ISR SuperGlide, 18"

ISR SUPERRAIL REMOVABLE MOUNTING KITS

MEQ#	DESCRIPTION
2324	24K ISR SuperRails, '99-'13 Ford
2326	24K ISR SuperRails, '99-'10 GM
2328	24K ISR SuperRails, '11-'13 GM
2330	24K ISR SuperRails, '08-'12 Dodge
2332	24K ISR SuperRails, '13 Dodge 2500
2334	24K ISR SuperRails, '13 Dodge 3500

5th Wheels



MEQ#	DESCRIPTION
1900	16K ISR Super 5 th
2100	18K ISR Super 5 th
2200	24K ISR Super 5 th



FIFTH WHEEL TOWING EXCELLENCE

PullRite's Super 5th fifth wheel hitches give you the safety, comfort, and strength you expect from PullRite. With a four-way articulating hitch plate and multiple height adjustments, Super 5th is the only hitch you need for worry free towing. Three different weight rating options means you can get the right hitch for the job, even when towing the big loads. Made to fit industry standard rails, you can replace your current hitch with an American made product, or install it fresh with PullRite's new fully removable ISR SuperRails for a clean bed when not towing.



MEQ#	DESCRIPTION
1300	18K OE Super 5 th
1400	25K OE Super 5 th
4435	20K OE Ford SG Adapter
4437	30K OE Gooseneck Ball
4438	30K OE Premium Ball Kit



FOR THE FORD TOW PREP PACKAGE

The OE Series line of Super 5th's are designed for use with Ford's Tow Prep Package. Why settle for the factory hitch when you can own a PullRite? These hitches use factory fifth wheel mounting points, are easy to install, have all the benefits of our superior automatic and dual-tilting hitch plate, and is adjustable from 15" to 18". OE SuperGlide Adapter and OE Gooseneck Balls available.

A tradition of American innovation and excellence continues.



5th Wheels

PullRite 5th Wheels



TRADITIONAL SUPERRAIL MOUNTING KITS



Fully removable without tools, leaving you with a clean truck bed when you're not towing. Brackets engineered to fit your specific truck frame. Many no-drill kits available. See Fit Chart for vehicle-specific kits.

WTS #PR4426/Mfg #4426, SuperGlide Ford HD (above)



ISR CUSTOM MOUNTING KITS



Brackets engineered to fit your specific truck frame. Designed to be stronger, faster, and easier to install. Many no-drill kits available. See Fit Chart for vehicle-specific kits.

WTS #PR2736/Mfg #2736, Dodge 2500 & 3500 (above)



ISR HD CUSTOM MOUNTING KITS



Not all base rails are created equal. PullRite's new 24K ISR HD base rails give you the strongest towing platform in the industry. Combined with our time saving Custom Brackets and engineered for superior strength, these rails outperform all others while still accepting any standard hitch. See Fit Chart for vehicle-specific kits.

WTS #PR2226/Mfg #2226, GM 2500 & 3500 (above)



UNIVERSAL MOUNTING KITS



Better than "theirs" mounting kits. Kit includes all items needed for installation. See fit chart for more details.

WTS #PR3340/Mfg #3340, SuperGlide UMK

WTS #PR2720/Mfg #2720, ISR Series UMK



GOOSENECK PLATES



Tow a gooseneck trailer with the mounting rails you already have. Plate available for all our mounting systems.

WTS #PR0808/Mfg #0808, 20K Super 5th style w/ ball

WTS #PR3335/Mfg #3335, 18K SuperGlide style w/ ball

WTS #PR2111/Mfg #2111, 25K ISR style w/ ball (above)

WTS #PR4437/Mfg #4437, 30K OE Ford style w/ ball

WTS #PR4438/Mfg #4438, 30K OE Series Gooseneck Plate w/ chrome ball & storage case



GOOSENECK ADAPTER KITS



Installs a traditional SuperGlide in your short bed with an underbed gooseneck already installed. Uses SuperRail "clean bed" technology. See Fit Chart for vehicle-specific adapters.

WTS #PR4431/Mfg #4431, B&W Ford (above)

WTS #PR4432/Mfg #4432, B&W Chevy/GMC

WTS #PR4433/Mfg #4433, B&W Dodge

WTS #PR4434/Mfg #4434, B&W Chevy/GMC

WTS #PR4435/Mfg #4435, OE Ford Prep Kit



QUICK CONNECT CAPTURE PLATES



Required to operate any SuperGlide hitch. See Fit Chart for more Capture Plates.

WTS #PR3365/Mfg #3365, Multi-Fit Capture Plate (above)

WTS #PR3317/Mfg #3317, Universal Capture Plate



TRADITIONAL LIFT KITS



Used with our Traditional SuperGlide hitches. Raises hitch 3" to accommodate deeper truck bed or shorter pin boxes.

WTS #PR4408/Mfg #4408, 18K for 4100/4400

WTS #PR3108/Mfg #3108, 12K for 3100



HITCH COVERS



Protect your investment. High grade marine vinyl. Custom fit.

WTS #PR3334/Mfg #3334, for 4100/4400

WTS #PR3134/Mfg #3134, for 3100

WTS #PR2112/Mfg #2112, for 1900/2100/2200

WTS #PR2912/Mfg #2912, for 2700/2900

WTS #PR1412/Mfg #1412, for 1300/1400



HORSE TRAILER ADAPTER



Convert your gooseneck trailer for use with a SuperGlide hitch. Fits 4" round tube coupler. Removable "wedge."

WTS #PR4424/Mfg #4424, Horse Trailer Adapter

5th Wheels

PullRite 5th Wheel Rails



SuperBracket Custom Brackets and SuperRail Brackets are not interchangeable - SuperBrackets use standard Super 5th base rails - SuperRails are unique, totally removable base rails.

SuperRail and SuperBracket Mounting Kits are vehicle-specific designs, providing the strongest, quickest installing, and most stable towing platforms in the industry.

MOUNTING KIT APPLICATION CHART

Universal Mounting Kits

SuperBracket Mounting Kits

SuperRail Mounting Kits

Long Bed & Short Bed Trucks



Kit includes "L" Brackets, Base Rails & Hardware



Kit Includes Custom Mounting Brackets, Base Rails, & Hardware



Kit Includes SuperRails, SuperRail Brackets & Hardware

Fits #1200 & #0800

Fits #1200 & #0800

Fits #1200 & #0800

Chevy		MFR#	WTS#	MFR#	WTS#	MFR#	WTS#
1999-2000	2500 & 3500 Ext/Crew Cab Long Bed	0820	PR0820				
1999-2013	1500 (not 5'8" bed)	0820	PR0820				
722001-2010	2500 & 3500 HD	0820	PR0820	0826	PR0826	0843	PR0843
2011-2013	2500 & 3500 HD	0820	PR0820	0830	PR0830	0847	PR0847
Dodge		Universal Kits		SuperBracket Kits		SuperRail Kits	
1995-2002	(except '02-'04 1/2 Ton)	0820	PR0820	0824	PR0824	0842	PR0842
2002-2008	1500 (requires drilling 8 holes)	0820	PR0820				
2003-2010	2500 & 3500 (NO DRILL) (except 2WD 3500)			0827	PR0827		
2003-2012	2500 & 3500 (NO DRILL) (except 2WD 3500 w/ overload springs)			0831	PR0831	0848	PR0848
2003-2012	3500 2WD (NO DRILL) *			0828	PR0828		
Ford		Universal Kits		SuperBracket Kits		SuperRail Kits	
1997-2003	F150	0820	PR0820				
1999-2013	F250 & F350	0820	PR0820	0822	PR0822	0841	PR0841
Toyota		Universal Kits		SuperBracket Kits		SuperRail Kits	
2007-2010	Tundra					0845	PR0845

* Price check required

The Mounting Kits above are designed for either one of the following Super 5th hitches...



16K

MFR# 1200

- 16,000 lb. max. gross trailer weight
- 4,000 lb. max. pin weight capacity
- 14-1/2" to 17-1/2" vertical height adjustment



20.5K

MFR# 0800

- 20,500 lb. max. gross trailer weight
- 5,125 lb. max. pin weight capacity
- 14-1/2" to 17-1/2" vertical height adjustment

5th Wheels

PullRite 5th Wheel Rails



The #4100 & #4400 SuperGlide hitches use *either* Universal Mounting Kits with fixed base rails or SuperRail Kits, with custom designed mounting brackets and totally removable SuperRails and Mounting Posts.

All of the Mounting Kits seen here fit **BOTH** #4100 and #4400 SuperGlide hitches.

MOUNTING KIT APPLICATION CHART

CALL FOR APPLICATION INFO WHEN KING PIN IS LOCATED BEHIND FRONT EDGE OF TRAILER.

B&W Adapter Mounting Kits	#4100 & #4400 Universal Kits	#4100 & #4400 SuperRail Kits
Short Bed Trucks		
Adapter Kit Includes B&W Adapter, removable Rails, Posts, Mounting Brackets & Hardware	Universal Rail Kit Includes "bolt to the bed" baserails, Universal "L" Brackets and Hardware	Includes totally removable SuperRails & Posts, Mounting Brackets & Hardware
Fits both #4100 & #4400 hitches		

Chevy		MFR#	WTS#	MFR#	WTS#	MFR#	WTS#
1999-2010	2500 & 3500	4434	PR4434	3340	PR3340	3345	PR3345
1999-2007	1500 (6-1/2' bed except 2007 new body style)			3340	PR3340	3345	PR3345
2007-2013	1500 (6-1/2' bed new body style)					4423	PR4423
2011-2013	2500 & 3500	4432	PR4432			4428	PR4428
Dodge		B&W Kits		Universal Rail Kits		SuperRail Kits	
1995-2002	(except '02 1500)			3340	PR3340	3346	PR3346
2003-2012	2500 & 3500	4433	PR4433			3349	PR3349
2002-2008	1500					3349	PR3349
2013	2500					4440	PR4440
Ford		B&W Kits		Universal Rail Kits		SuperRail Kits	
1997-2003	F-150 (not SuperCrew)			3340	PR3340	3342	PR3342
1999-2013	F250 & F350	4431	PR4431	3340	PR3340	4426	PR4426
2004-2013	F-150 (6-1/2' bed)					3361	PR3361
Toyota		B&W Kits		Universal Rail Kits		SuperRail Kits	
2007-2012	Tundra (Double Cab Only 6-1/2' bed Universal Rails with Custom Mounting Brackets)			4421	PR4421		

The Mounting Kits above are designed for *either one* of the following SuperGlide hitches...



16K

MFR# 4100

- 16,000 lb. max. GTW
- 4,000 lb. max. pin weight
- 14" of automatic slide



20K

MFR# 4400

- 20,000 lb. max. GTW
- 5,000 lb. max. pin weight
- 14" of automatic slide

5th Wheels

5th Wheels

PullRite 5th Wheel Rails



The #3100 & #3600 SuperGlide hitch mounting kits feature custom-designed mounting brackets and are totally removable.

Trucks with less than 6' beds are usually not recommended for fifth wheel towing, however, with some trailer limitations the #3100 SuperGlide, may make towing possible. In cases where there will be less than 3" clearance between the cab and trailer, including a 90 degree turn, the #3100 is not recommended.

MOUNTING KIT APPLICATION CHART

CALL FOR APPLICATION INFO WHEN KING PIN IS LOCATED BEHIND FRONT EDGE OF TRAILER.

#3100 SuperRail Kits

#3600 SuperRail Kits

Short Bed Trucks



Includes removable SuperRails & Posts, Mounting Brackets and Hardware. The #3100 features a totally removable baserail design.



Includes totally removable Mounting Posts, Brackets and Hardware. The #3600 requires no baserails.

Chevy		Fits only the #3100 kits		Fits only the #3600 kits	
		MFR#	WTSE	MFR#	WTSE
1999-2010	2500 & 3500			3515	PR3515
1999-2007	1500 (6-1/2' bed, except 2007 new body style)			3515	PR3515
2004-2007	1500 (5'8" bed, except 2007 current body style. Added limitations on trailers 98" or wider)	3114	PR3114		
2007-2013	1500 (5'8" bed, current body style only)	3117	PR3117		
2011-2013	2500 & 3500			3521	PR3521
Dodge		SuperRail Kits		SuperRail Kits	
		MFR#	WTSE	MFR#	WTSE
1995-2002	(except '02 1500)			3516	PR3516
2003-2012	2500 & 3500 (added limitations on trailers 96" or wider) (NO DRILL)			3519	PR3519
2002-2008	1500 (added limitations on trailers 96" or wider) (NO DRILL)				
2009-2013	1500 (5'7" & 6-1/2' bed, added limitations 96" or wider trailers) (2013 models: coil spring suspension only)	3120	PR3120		
2013	1500 (air suspension only)	3122	PR3122		
2013	2500 & 3500			3522	PR3522
Ford		SuperRail Kits		SuperRail Kits	
		MFR#	WTSE	MFR#	WTSE
1997-2003	F-150 (not SuperCrew)			3512	PR3512
1999-2013	F250 & F350 (not for 2011 Diesel...see below)			3520	PR3520
2001-2003	SuperCrew F-150 (5'6" bed)	3111	PR3111		
2004-2008	SuperCrew F-150 (5'6" bed. Added limitations on trailers over 90" wide)	3113	PR3113		
2009-2013	F-150 (5'7" bed added limitations on 96" or wider trailers)	3119	PR3119		
Nissan		SuperRail Kits		SuperRail Kits	
		MFR#	WTSE	MFR#	WTSE
2004-2013	Titan Short Beds (Crew Cab limitations on trailers over 90" wide. King Cab may be used up to 102" wide—call for more information)	3115	PR3115		
Toyota		SuperRail Kits		SuperRail Kits	
		MFR#	WTSE	MFR#	WTSE
2001-2006	Tundra (Standard Ext. Cab)	3112	PR3112		
2007-2012	Tundra (Crew Max and 5'8" bed only)	3118	PR3118		



12K

MFR #3100

- 12,000 lb. max. GTW
- 3,000 lb. max. pin weight
- 22-3/4" of automatic slide



24K

MFR #3600

- 24,000 lb. max. GTW
- 6,000 lb. max. pin weight
- 18" of automatic slide

5th wheels

5th Wheels

PullRite 5th Wheel Rails



*ISR Series Mounting Kits

*Industry Standard Rail

- Better than the "other guys" mounting kits
- UMK fits more trucks without ordering extra kits
- UMK and Custom Brackets facilitate installation over truck axle
- Less drilling/quicker installs with Custom Mounting Kits
- ISR Mounting Kits rated to 18K. See note below.

MOUNTING KIT APPLICATION CHART

ISR Universal Mounting Kits

ISR Custom Mounting Kits

ISR SuperRail Mounting Kits

Long Bed & Short Bed Trucks

Fits all ISR hitch models



Kit Includes "L" Brackets, ISR Base Rails & Hardware



Kit Includes Custom Mounting Brackets, ISR Base Rails, & Hardware



Includes totally removable Super Rails & Posts, Mounting Brackets & Hardware

Chevy		MFR#	WTS#	MFR#	WTS#	MFR#	WTS#
1999-2010	2500 & 3500 HD			2734	PR2734	2326	PR2326
2003-2013	2500 & 3500 HD	2720	PR2720				
2011-2013	2500 & 3500 (NO DRILL)			2724	PR2724	2328	PR2328
2007-2013	1500	2720	PR2720	2730	PR2730		
Dodge							
2003-2012	2500 & 3500 (NO DRILL)			2736	PR2736	2330	PR2330
2003-2012	2500 & 3500 (does not fit 3500 w/overload springs)	2720	PR2720				
2009-2012	1500			2728	PR2728		
2013	2500 (NO DRILL)			2740	PR2740	2332	PR2332
2013	3500					2334	PR2334
Ford							
1999-2013	F250 & F350	2720	PR2720			2324	PR2324
1999-2010	F250 & F350			2726	PR2726		
2004-2013	F150 (NO DRILL)			2732	PR2732		
2011-2013	F250 & F350 (NO DRILL)			2738	PR2738	2324	PR2324

Please note, in order to determine the total tow of a system, you must consider the weight ratings of each component in that system. This includes, but may not be limited to, the rating of the tow vehicle, the fifth wheel hitch, and the hitch's mounting system. Actual tow of the system will be equal to the lowest rated component.



16K — MFR# 1900

- 16,000 lb. max. GTW
- 4,000 lb. max. pin weight
- 16" to 19" vertical height adjustment



18K — MFR# 2100

- 18,000 lb. max. GTW
- 4,500 lb. max. pin weight
- 16" to 19" vertical height adjustment



15K — MFR# 2700

- 15,000 lb. max. GTW
- 3,750 lb. max. pin weight
- 14" of automatic slide



18K — MFR# 2900

- 18,000 lb. max. GTW
- 4,500 lb. max. pin weight
- 14" of automatic slide

5th Wheels

5th Wheels

PullRite 5th Wheel Rails

NEW!

HEAVY DUTY ISR Series Mounting Kits

**Industry Standard Rail*

• Heavy Duty ISR Mounting Kits rated to 24K. See note below.

MOUNTING KIT APPLICATION CHART

**ISR Universal
Mounting Kits**

**ISR Custom
Mounting Kits**

**ISR SuperRail
Mounting Kits**

Long Bed & Short Bed Trucks

Fits #2200 & #2300



Kit Includes "L" brackets,
ISR HD Base Rails & Hardware



Kit Includes Custom Mounting
Brackets, ISR HD Base Rails, &
Hardware



Includes totally removable
SuperRails & Posts, Mounting
Brackets & Hardware

Chevy		MFR#	WTS#	MFR#	WTS#	MFR#	WTS#
1999-2010	2500 & 3500			2224	PR2224	2326	PR2326
2003-2013	2500 & 3500	2220	PR2220				
2011-2013	2500 & 3500 (NO DRILL)			2226	PR2226	2328	PR2328
Dodge							
2003-2012	2500 & 3500 (NO DRILL)			2230	PR2230	2330	PR2330
2003-2012	2500 & 3500 (does not fit 3500 w/overload springs)	2220	PR2220				
2013	2500					2332	PR2332
2013	3500					2334	PR2334
Ford							
1999-2013	F250 & F350	2220	PR2220				
1999-2010	F250 & F350			2228	PR2228	2324	PR2324
2011-2013	F250 & F350 (NO DRILL)						

The Mounting Kits above are designed for use with our Heavy Duty Super 5th and SuperGlide hitches, but may also be used with any industry standard hitch.

Please note, in order to determine the total tow of a system, you must consider the weight ratings of each component in that system. This includes, but may not be limited to, the rating of the tow vehicle, the fifth wheel hitch, and the hitch's mounting system. Actual tow of the system will be equal to the lowest rated component.

NEW! 24K ISR HITCHES



MFR# 2200

- 24,000 lb. max. GTW
- 6,000 lb. max. pin weight
- 16" to 19" vertical height adjustment



MFR# 2300

- 24,000 lb. max. GTW
- 6,000 lb. max. pin weight
- 18-1/2" of automatic slide

5th wheels

5th Wheels

5th Wheel to Goose Conversion

B&W TRAILER HITCHES



Companion 5th Wheel Hitch



Note:
BW3050 For Flat-bed Truck Install Only

- 18,000 GTW
- Easily convert from a hitch to a level bed
- Requires no mounting rails to secure the hitch to the truck bed
- Vibration dampening polyurethane bushings provide a quiet, rattle-free towing experience
- Camaction latching handle offers effortless hook up and release, even under pressure
- Full 1 1/8" wraparound locking jaws for a worry free connection and a smooth tow
- Fully articulating head allowing front to back and side to side pivoting
- Patented hydraulic dampener permitting a controlled 7 degree side to side tilt.
- Three vertical adjustments from 14.75 inches to 16.75 inches
- Three positions giving you four inches of horizontal adjustment
- Rugged wide stance engineered for improved stability and strength
- Powder coated for a nice looking, durable, long lasting finish
- All components manufactured in the U.S.A.

Item Number	Description	SO
BW3000	RV 5th Wheel Hitch 18K Companion	
BW3020PL	RV Post Replacement Companion	Yes
BW3025-119A	Pin w/Chain for 3000 ea.	Yes
BW3035A	Bracket Upright for BW3000	Yes
BW3035B	Bracket Upright for BW3000	Yes
BW3050	5th Wheel Hitch 22K Flatbed	
BW3055	Mounting Kit	Yes
BW4000	Adapter Inverted King Pin	
BW5THDISPLAY	Companion Display	
BWRVB3006	RV Companion Base Unit 3000	
BWRVB3055	Flatbed Companion Base Only	Yes
BWRVB3300	Companion OEM Base	Yes
BWRVC3006	Head Companion Only	
BWRVK3050	5th Wheel Flatbed 22K Companion	Yes
BWRVK3200	RV 5th Wheel Hitch 16K Patriot	
BWRVK3400	RV Base/Coupler Slider Kit	
BWRVR3200	Universal Rails for Patriot	
RVC3006	Coupler for BW3050	



BW3000



BW3050



BW4000



Part Number: RVK3300

Customers surprised with the Ford prep package from the factory now have a choice in fifth wheel hitches. The Companion OEM, designed to fit the new Ford OEM hitch platform, installs and removes easily with its' two-piece design. It's notable for its effortless hookup and release with the camactuated latching mechanism. 1" thick cast locking jaws are machined with tight tolerances, providing a perfect connection to the camper and a smooth towing experience. Everything you expect from a B&W.

5th Wheels

5th Wheel Accessories Bed Saver



A: Capacity B: Mfg.

Item Number	Description	SO	A	B
BXR4100	Bed Saver Reese Pro Series Slider	Yes	15K	Blue Ox
BXR4101	Bed Saver Draw-Tite/Reese		14/15/16K	Blue Ox
BXR4102	Bed Saver Drawite/Reese Hitches	Yes	18/20/22K	Blue Ox
BXR4104	BedSaver Reese Pro Series Slider	Yes	15K	Blue Ox
BXR4105	Bed Saver Draw-Tite/Reese	Yes	18/24K	Blue Ox
BXR4200	Bed Saver Tuff-Tow/Brophy/RBW	Yes	15.5K	Blue Ox
BXR4400	Bed Saver Valley/Sliders	Yes	16K	Blue Ox
BXR4401	Bed Saver Valley/Husky		15K	Blue Ox
BXR4500	Bed Saver PullRite	Yes	16K	Blue Ox
BXR4505	Bed Saver PullRite	Yes	18K	Blue Ox
BXR4506	Bed Saver PullRite	Yes	14/16K	Blue Ox
BXR4800	Bed Saver Curt	Yes	20K	Blue Ox

5th Wheels

5th Wheel Accessories Bed Saver

BedSaver And PinLock Application List

Fits	Bedsaver Part No	PinLock Part No	BedSaver Inside Width
B & W Companion (Up to 18K)	BXR4700		16 1/2"
Brophy 15.5 K	BXR4200	BXR5202 or BXR5203	23 1/4"
Curt 20K	BXR4800	NA	N/A
Drawtite 14K-15K-16K Classic Hitches™	BXR4100	NA	32 3/8"
Drawtite 18K Signature Series	BXR4105	NA	NA
Drawtite 14K-15K-16K Slider Hitches	BXR4101**	NA	32 3/8"
Drawtite 18K-20K-22K	BXR4102	NA	25 1/2"
Drawtite 18K & 24K Signature Series			
Hidden Hitch 18K	BXR4300	NA	33 3/8"
Hijacker 16K Ultra	BXR4600	NA	27 1/2"
Husky 16K and 16K Sliders	BXR4400	NA	24 1/4"
Husky 15K	BXR4401	NA	24 1/4"
Husky 20K	BXR4403	NA	24 1/4"
Husky 24K	BXR4402	NA	27"
Proeagle 15K	BXR4200	BXR5202 or BXR5203	23 1/4"
Pullrite 15.5K	BXR4500	NA	27 1/2"
Pullrite 16K	BXR4500	NA	27 1/2"
Pullrite 16K Super Glide	BXR4501	NA	NA
RBW Lil' Rocker	BXR4200	BXR5202 or BXR5203	23 1/4"
RBW X-16	NA	BXR5202 or BXR5203	NA
Reese 14K-15K-16K Classic Hitches™	BXR4100	NA	32 3/8"
Reese 14K-15K-16K Slider Hitches	BXR4101**	NA	32 3/8"
Reese 18K Signature Series	BXR4105	NA	NA
Reese 18K-20K-22K (No 18K Select Plus)	BXR4102	NA	25 1/2"
Reese 18K Select Plus	BXR4103	NA	24 1/4"
18K & 24K Signature Series			
Reese Pro Series 15k Hitches	BXR4103	NA	24 1/4"
Reese Pro Series 15k Sliders	BXR4104	NA	24 1/4"
Robin Industries 15.5K	BXR4200	NA	23 1/4"
Tuff Tow 15.5K	BXR4200	BXR5202 or BXR5203	23 1/4"
Valley 16K and 16K Sliders	BXR4400	NA	24 1/4"
Valley 15K	BXR4401	NA	24 1/4"
Valley 24K	BXR4402	NA	27"



Safe, Worry Free Travel With The BedSaver Fifth Wheel Safety System

Dropping your fifth wheel is more common - and dangerous - than you might think. Just ask some of your RV friends that have experienced it.

You can put that worry to rest with the BedSaver. This inexpensive, hassle-free safety device is a "must have" for every fifth wheel puller. With BedSaver™, you can forget about dropping your fifth wheel - and forget about the potential danger, damage, expense, and embarrassment! The BedSaver is a sound investment with great returns for all fifth wheel pullers.

- No moving parts. BedSaver is always ready and requires little maintenance after installation
- Easy to install, requiring no drilling or hitch modification
- Hardware and instructions are included
- Trailer loads and unloads normally
- Black powder coated finish matches most hitches, blending so well it's difficult to tell it's even there
- Catches the pin and holds it SAFE AND SECURE

Quick Connect Plate

5th Wheels

5th Wheel Accessories Quick Connect Plate



CAPTURE PLATE OPTIONS

(REQUIRED FOR ALL SUPERGLIDE HITCH FUNCTIONALITY)




QuickConnect Capture Plates are designed to work with popular king pin box models—simplifying and significantly reducing installation times. Most QuickConnect applications slip over the king pin and are held in place by a set screw and nylon spacer, holding it onto the king pin box. When the trailer is hooked up to the hitch, the Capture Plate's wedge isolates the king pin from turning in the fifth wheel plate, causing the Cam Assembly to activate and allowing the SuperGlide to move as turns are being made. To identify the correct Capture Plate for a specific king pin box on the trailer, use the chart below.

Multi Fit QuickConnect Plates are designed to offer even more flexibility and will fit a much wider selection of king pin boxes by using a design that accommodates all "C" measurements (length of the king pin box front-to-back). Simply confirm your trailer's "A" and "B" measurements to make certain the Multi Fit is the Capture Plate for you.



Universal Capture Plates can be used for most trailers. Relatively simple, but can be time consuming to install. In cases where the fore-to-aft dimension of the king pin box is very short, extension plates (must be welded to your trailer's king pin plate) and knee braces are added to support the Capture Plate. QuickConnect Plates are much quicker, and easier to install.



QuickConnect Capture Plate Sizing Chart

King Pin Box Manufacturer	MFR#	WTS#	King Pin Box Model #	Measurement A	Measurement B	Measurement C
				CAUTION: Measurement cannot be smaller than noted below. (see above diagram)	TIP: Use straight edge when measuring to the leading edge of pin box. (see above)	TIP: Use straight edge when measuring to the leading edge of pin box. (see above)
5th Airborne (medium)	331709	PR331709	Most Models	10-1/2"	6-7/8"	14-1/4"
Demco (Universal will not work)	331750	PR331750	Most Models	10-3/4"	5"	11-7/8"
Demco (Universal will not work)	331751	PR331751	Most Models	11-1/4"	5-1/8"	12-1/16"
Dexter	331731	PR331731	Most Models	12"	5-9/16"	12-1/4"
Fabex	331720	PR331720	500s, 765, 770*	13-1/2"	3-1/4"	9-1/4"
Fabex	331706	PR331706	Most Models	12"	4-5/8"	11-3/8"
Leland	331730	PR331730	Most Models	14"	5-1/2"	12-1/4"
Lippert (long)	331704	PR331704	1621*	12-3/4"	3-3/8"	8-7/8"
Lippert (long)	331711	PR331711	1621 HD*	12-3/4"	4"	8-7/8"
Lippert (long)	331705	PR331705	1621*	13-1/4"	3-3/8"	8-7/8"
Lippert (medium)	331705	PR331705	1116*	13-1/4"	3-1/2"	9-3/16"
Lippert (long)	331705	PR331705	1716*	13-1/4"	3-1/4"	8-7/8"
Lippert	331710	PR331710	0719**	12-3/4"	6-3/8"	12-1/4"
MOR/ryde (don't use Universal or Multi-fit)	331707	PR331707	Rubber Cushion	13-1/2"	5-3/4"	14-5/8"
Trailair Rotoflex (don't use Universal or Multi-fit)	331756	PR331756	Rotoflex Only	13-3/8"	5-3/8"	11-7/16"
Trailair Tri Glide	331757	PR331757	Tri Glide Only	12-3/4"	5-15/16"	ALL
Trailair Airbag/Shock Pin Box	331758	PR331758	L02-L09 & M14-M23	13-3/8"	7-3/8"	13-1/2"

Multi-fit QuickConnect Capture Plate

Multi-fit Capture Plate	3365	PR3365	* Fits the indicated pin boxes above	12-3/4" through 13-1/2" and 14"	2-9/16"-4"	ALL
Multi-fit Capture Plate	3366	PR3366	** Fits the indicated pin boxes above	12, 12-1/4", 12-3/4"	5-3/16"-6-5/8"	ALL

Universal Capture Plate

Universal Capture Plate Kit	3317	PR3317	INCLUDES: Universal Capture Plate, Fore & Aft Plate Extensions, Knee Braces, & Hardware			
-----------------------------	------	--------	---	--	--	--

5th Wheels

5th Wheel Accessories Lube Plates, Clips



CU16721
CU16721025



FWRC



KPT809F

A: Mfg.

Item Number	Description	A
CU16721	5th Wheel Disc Lube	Curt
CU16721025	5th Wheel Disc Lube 25pk	Curt
FWRC	5th Wheel Retention Clip Hardened	Buyers
KPT809F	King Pin Bolster Plate .38in	Buyers

5th Wheels

Tail Gates Lift Gate



Quality since 1946
The EZ Gate
5201000



EL1



The EZ Gate Trailer Gate Assist Reduces lifting by 90% which also reduces the chance of injury and fatigue. Works on open utility trailers with a side rail height of 10" or more and with gates up to 180 lbs. It also features a no rattle spring insert and a black powder coat finish. All mounting hardware and easy to follow instructions are included.

A: Mfg.

Item Number	Description	SO	A
5201000	Tailgate Kit EZ Gate Trailer	Yes	Buyers
EL1	Easy Lift Tailgate		Hopkins